




Outdoor & Wet Location Rated | Dimmable | 3 Year Warranty

Product Code	Voltage	Wattage	Color Temperature	Lumens
ALED-RD05HV	100 - 120V AC	2.5W	WW 2700K / 3000K / 4000K / CW 5000K	175
ALED-RD05LV	12V AC / DC	2.5W	WW 2700K / 3000K / 4000K / CW 5000K / (RGB - 12V DC)	175

Features

- › For indoor & outdoor applications
- › cETLus listed for indoor and outdoor wet applications
- › Fits standard octagon/round junction boxes
- › All trims available in all styles and colors
- › We can package trim and light engine separate or together
- › Dimmable
- › +50,000 hour lifespan

Finishes

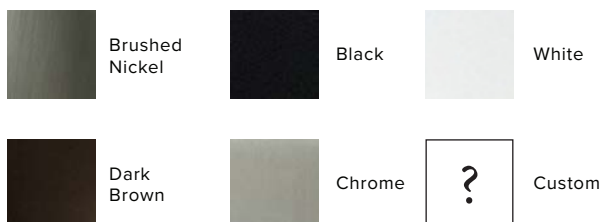


Applications Cabinets / Path / Deck

Trim Styles Window, Louver

Dimensions

Fits with standard round gang junction box

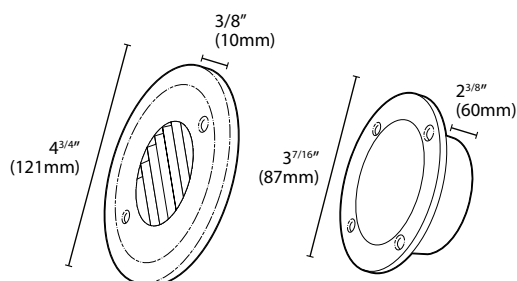

Ordering Guide

Choose light engine and trims. Follow codes accordingly:

#1: Light Engine

Image	Product	Product Code	Description	Color Temperature
	High Voltage	ALED-RD05HV-XX	For W, LV, VL , and SC trims Includes gasket	2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K)
	Low Voltage	ALED-RD05LV-XX		2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K) / RGB

XX: Color Temperature

#2: Trim Style

Image	Product	Product Code	Description	Finish
	Window (W)	ALED-RD05-TR-W-##	For standard octagon/ round gang light engine	Brushed Nickel (BN), Black (BK), White (WT), Dark Brown (DB), Chrome (CH)
	Louver (L)	ALED-RD05-TR-L-##	For standard octagon/ round gang light engine	Brushed Nickel (BN), Black (BK), White (WT), Dark Brown (DB), Chrome (CH)

##: Trim Color