




Outdoor & Wet Location Rated | Dimmable | 3 Year Warranty

Product Code	Voltage	Wattage	Color Temperature	Lumens
ALED-RT05HV (High Voltage)	100 - 120V AC	2W	WW 2700K / 3000K / 4000K / CW 5000K	185
ALED-RT05LV (Low Voltage)	12V AC / DC	2W	WW 2700K / 3000K / 4000K / CW 5000K / (RGB - 12V DC)	185

Features

- › For indoor & outdoor applications
- › cETLus listed for indoor and outdoor wet applications
- › Fits standard North American junction boxes
- › All trims available in all styles and colors
- › Dimmable
- › +50,000 hour lifespan

Finishes

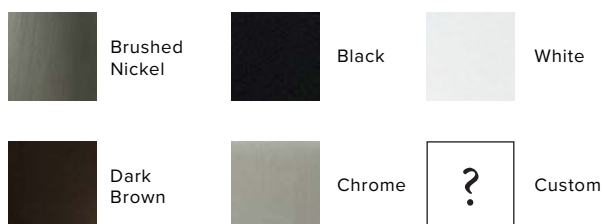


Applications Step / Path / Deck

Trim Styles Horizontal Recessed, Vertical Recessed, Flat Open

Dimensions

Fits with single gang junction box

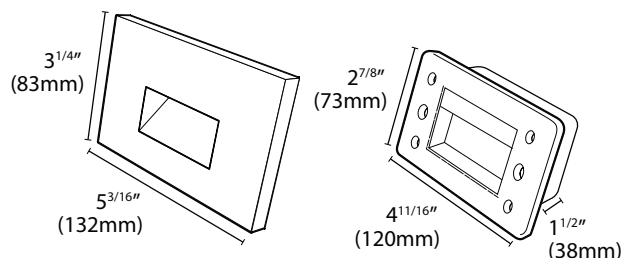

Ordering Guide

Choose light engine and trims. Follow codes accordingly:

#1: Light Engine

Image	Product	Product Code	Description	Color Temperature
	High Voltage Horizontal (RH)	ALED-RT05HV-RH	For RH trims	2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K)
	Low Voltage Horizontal (RH)	ALED-RT05LV-RH		2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K) / RGB
	High Voltage Vertical (RV)	ALED-RT05HV-RV	For RV trims	2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K)
	Low Voltage Vertical (RV)	ALED-RT05LV-RV		2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K) / RGB
	High Voltage Flat Open (RO)	ALED-RT05HV	For RO trims	2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K)
	Low Voltage Flat Open (RO)	ALED-RT05LV		2700K (27K) / 3000K (3K) / 4000K (4K) / 5000K (5K) / RGB

#2: Trim Style

Image	Product	Product Code	Description	Finish
	Horizontal Recessed (RH)	ALED-RT05-RH-T-##-XX	For RH light engines	Brushed Nickel (BN), Black (BK), White (WT), Dark Brown (DB), Chrome (CH)
	Vertical Recessed (RV)	ALED-RT05-RV-T-##-XX	For RV light engines	Brushed Nickel (BN), Black (BK), White (WT), Dark Brown (DB), Chrome (CH)
	Flat Open (RO)	ALED-RT05-RO-T-##-XX	For RO light engines	Brushed Nickel (BN), Black (BK), White (WT), Dark Brown (DB), Chrome (CH)

##: Trim Color, XX: Color Temperature